


Fork extension

GVL

Open section

The **fork extension GVL** has a half open section and is used where loads have large volume but small weight. They are made of high tensile steel plate. The fork extensions are kept in place by a retaining bolt. The length of the fork has to be minimum 60% of the length of the extensions e. g. extensions 2 000 mm x 0.6 = minimum fork length = 1200 mm.

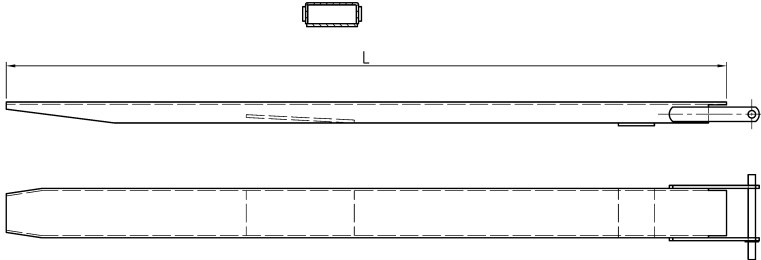

type	for fork section b x h mm	external Dimensions b x h mm	capacity kg/mm LC/set	weight per set kg / length				
				1200	1500	1600	1800	2000
GVL 10 A	80x40	102x62	900/500	24 kg	30 kg	32 kg	36 kg	40 kg
	80x50	102x72						
GVL 10 B	100x30	122x52	1200/500	24 kg	30 kg	32 kg	36 kg	40 kg
	100x40	122x62						
GVL 20 A	100x45	126x71	1500/500	26 kg	34 kg	36 kg	40 kg	60 kg
	100x50	126x76						
GVL 20 B	120x40	146x66	1800/500	28 kg	34 kg	36 kg	42 kg	62 kg
	120x45	146x71						
GVL 30 A	125x40	151x66	2100/500	28 kg	36 kg	38 kg	56 kg	62 kg
	125x45	151x71						
GVL 30 B	120x50	146x76	2100/500	30 kg	38 kg	40 kg	60 kg	66 kg
	125x50	151x76						
	130x50	156x76						
GVL 40 A	140x50	166x76	2400/500	32 kg	38 kg	42 kg	62 kg	70 kg
GVL 40 B	130x60	156x86	2400/500	32 kg	40 kg	44 kg	64 kg	72 kg
	150x40	176x66						
	150x45	176x71						
	150x50	176x76						



● other fork sections or lengths upon request.

DURWEN 
Forklift Attachments

More than 60 years experience