


## Load backrest for sideshift

for VGT, DST (per one carriage times number of carriages), DG


type	ISO	width B mm	height* h mm
LS-G 25	II	920	1000
		1020	1000
		1100	1000
		1150	1000
LS-G 45	III	1150	1200
		1350	1200
LS-G 80	IV	1420	1500
		1800	1500

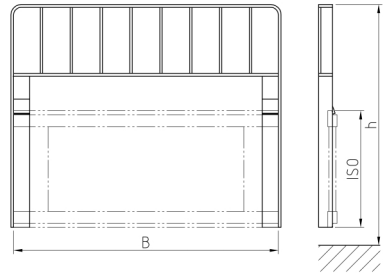

## Load backrest for clamp and fork positioners

for PGK, PBK, PHK, DGK, USK, UKKS, UKK, ZVP, RZV, PZV


type	ISO	width B mm	height* h mm
LS-K 25	II	920-1100	1000
		1150-1350	1000
LS-K 45	III	1040-1150	1200
		1200-1350	1200
LS-K 80	IV	1420-1800	1500
		1850-2400	1500

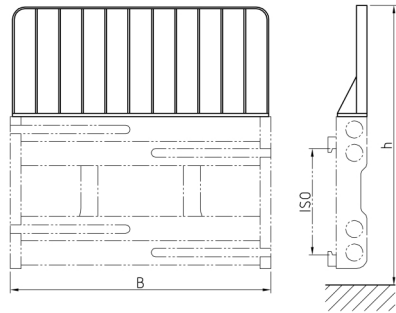

## Load backrest for fork positioner

for WZV, WZV-G, ZVR, ZVI, SZV

type	ISO	width B mm	height* h mm
LS-ZV 25	II	920-1040	1000
		1100-1350	1000
LS-ZV 45	III	1040-1100	1200
		1150-1350	1200
LS-ZV 80	IV	1420-1800	1500
		2000-2200	1500

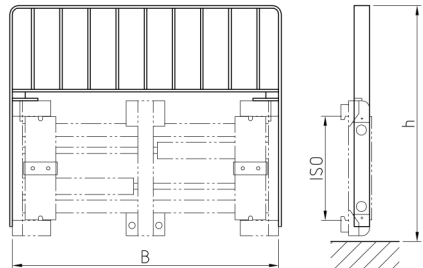

\* ISO 2328-A