


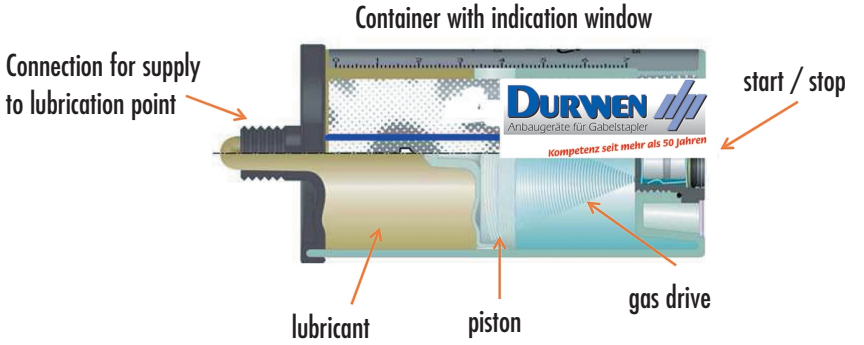


Accessories

solenoid valve 12,24 or 48 Volt, indicate voltage	push button with microswitch main thread M 10	auto lube system
		
upon request	upon request	for sideshift top and bottom - DPK 16-30 upon request for sideshift top - DPK 35-80/DRPK/SPK upon request

automatic lubrication / auto lube system



Container with indication window


Connection for supply to lubrication point

start / stop


lubricant

piston


gas drive



With a band clamp the container is fixed securely on the attachment



Drive adjustable from 1-12 months with a stop and go option



- reduces service life cost
- 125 ml content
- lubricant output adjustable at any time
- stop and go possible
- refillable
- environmental friendly



More than 60 years experience