


Bale clamp

integral sideshift



PBK
ISO IV+

The bale clamp PBK is made with double T steel profiles. This type of profile supports excellent visibility through the clamp and allows for a reduced lost load centre. The smooth and flush arms allows for dense stacking of bales. A integral sideshift is fitted as standard.

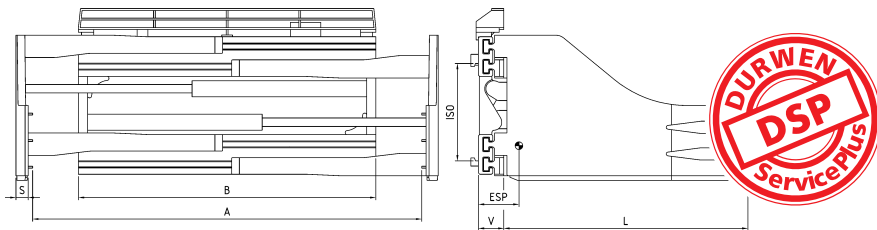

type	lift truck capacity tons	ISO	capacity kg/mm LC	opening range A III mm	B mm	height H mm	length L mm	S mm	V LLC mm	ESP COG mm	weight kg
PBK 50	5,0/600	IV	4000/600	750-2400	1450	460	1200	40	188	260	1050
				750-2400	1450		1400			330	1120
				530-2300	1550		1200			250	1150
				530-2300	1550		1400			320	1210
				570-2400	1650		1200			240	1180
				570-2400	1650		1400			310	1240
PBK 60	6,0/600	IV	4000/800	700-2500	1650	460	1200	50	158	270	1590
				700-2500	1650		1400			340	1660
				550-2450	1850		1200			250	1670
				550-2450	1850		1400			320	1730
PBK 80	7,0-8,0/600	IV	5000/800	700-2500	1650	500	1200	50	166	270	1690
				700-2500	1650		1400			340	1770
				700-2500	1650		1600			410	1850
				550-2450	1850		1400			320	1870
				550-2450	1850		1600			390	1950
PBK 100	8,0/900 10,0/600	IV	6500/800	730-2900	2000	500	1400	80	205	310	2150
				730-2900	2000		1600			370	2220
				630-3100	2400		1400			290	2280
				630-3100	2400		1600			350	2350
PBK 110	8,0/1100 12,0/600	IV	8000/800	700-3000	2400	500	1400	80	249	280	2650
				700-3000	2400		1600			340	2720
PBK 140	14,0/600	Pin	10000/800	870-4100	3200	550	1400	70	310	325	4450
				870-4100	3200		1600			380	4570

- 2 hydraulic functions required
- constant sideshift +/- 150 mm upon request
- includes hoses and couplings
- cylinder protection ISO IV upon request

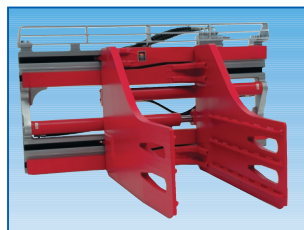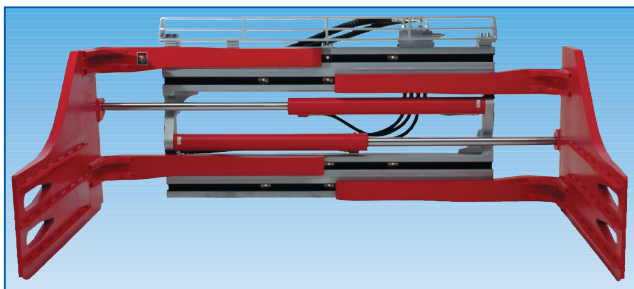

DURWEN 
Forklift Attachments

More than 60 years experience