


Fork clamp

integral sideshift, bolt-on forks

PGK
ISO II/III

The **fork clamp PGK** can spread the forks beyond the attachment frame width. It can carry loads on the forks as well as clamped between the forks. The strong steel profiles allow for excellent visibility and minimised lost load centre. A integral sideshift is included as well as bolt-on forks.

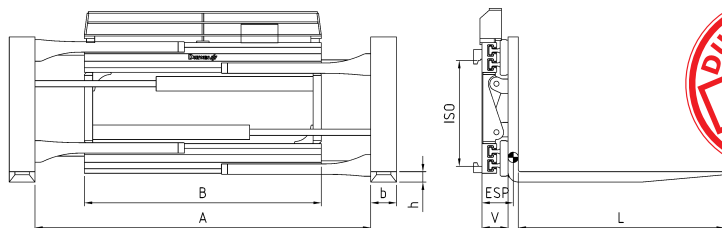

type	lift truck capacity tons	ISO	capacity on forks kg/mm LC	capacity as clamp kg/mm LC	A opening range [T] mm	B mm	forks b x h x l mm	V LLC mm	ESP COG mm	weight kg
PGK 15	1,0-1,5	II	1400/500	1200/500	360-1510	980	100x40x1200	126	218	335
					360-1580	1050			212	345
PGK 25	2,0-2,5	II	2400/500	1900/500	310-1460	980	125x45x1200	126	232	405
					310-1530	1050			228	415
					310-1560	1080			227	420
					310-1630	1150			225	430
					70-1150	1150			222	425
					310-1680	1200			227	435
PGK 30	3,0	III	2900/500	2400/500	310-1460	980	125x50x1200	126	230	425
					310-1530	1050			225	435
					310-1630	1150			220	450
					210-1430	1150			222	445
					310-1680	1200			218	460
					310-1780	1300			216	470
					310-1830	1350			215	480
310-1930	1450	210	496							
PGK 35	3,5	III	3600/500	2700/500	260-1580	1150	150x50x1200	136	250	510
					260-1680	1250			245	530
PGK 40	4,0	III	4100/500	2900/500	250-1660	1250	150x50x1200	138	218	600
					250-1760	1350			215	620
					250-1860	1450			210	635
PGK 45	4,5-5,0/500	III	4500/600	3500/500	250-1660	1250	150x60x1200	148	215	650
					250-1760	1350			210	670
					250-1860	1450			209	690
PGK 48	5,0/600	III	4800/600	3500/600	250-1700	1350	150x70x1200	158	225	780
					250-1800	1450			220	810

- features bolt-on forks as standard
- includes hoses and couplings
- 2 hydraulic functions required
- slip on arms see accessories
- cylinder protection upon request