


Fork clamp

PGK-S
ISO II/III

constant sideshift +/- 100 mm, bolt-on forks

The fork clamp **PGK-S** can spread the forks beyond the attachment frame width. It can carry loads on the forks as well as clamped between the forks. The strong steel profiles allow for excellent visibility and minimised lost load centre. A constant sideshift is included as well as bolt-on forks.

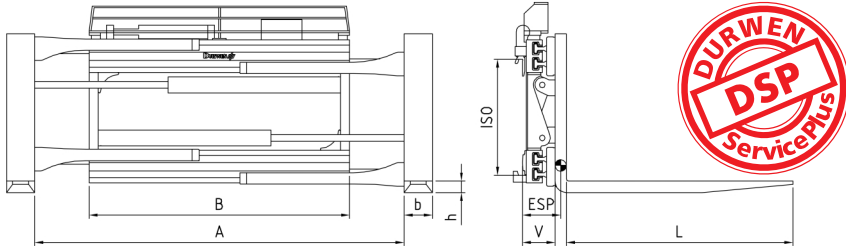


type	lift truck capacity tons	ISO	capacity on forks kg/mm LC	capacity as clamp kg/mm LC	A opening range ITI mm	B mm	forks b x h x l mm	sideshift mm	V LLC mm	ESP COG mm	weight kg	
PGK 15-S	1,0-1,5	II	1400/500	1200/500	360-1510 360-1580	980 1050	100x40x1200	+/- 100	143	210 202	355 365	
PGK 25-S	2,0-2,5	II	2400/500	1900/500	310-1460	980	125x45x1200	+/- 100	143		222	425
					310-1530	1050					218	435
					310-1630	1150					215	450
					70-1150	1150					212	445
					310-1680	1200					217	455
					310-1880	1400					205	485
PGK 30-S	3,0	III	2900/500	2400/500	310-1460	980	125x50x1200	+/- 100	143		220	445
					310-1530	1050					215	455
					310-1630	1150					210	470
					210-1430	1150					212	465
					310-1680	1200					210	480
					310-1780	1300					205	490
					310-1830	1350					205	500
					310-1930	1450					200	515

- features bolt-on forks as standard
- includes hoses and couplings

- 2 hydraulic functions required
- toe in on forks as standard

- slip on arms see accessories
- sideshift with bottom rollers as standard
- cylinder protection upon request
- includes protection strip

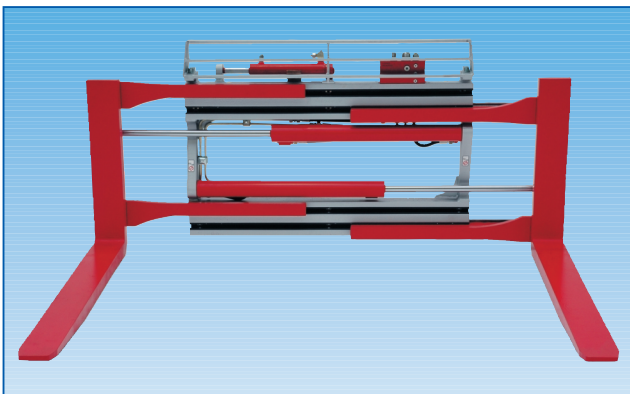

DURWEN 
Forklift Attachments

More than 60 years experience