


Fork clamp

constant sideshift +/- 160 mm, bolt-on forks

The **fork clamp PGK-S** can spread the forks beyond the attachment frame width. It can carry loads on the forks as well as clamped between the forks. The strong steel profiles allow for excellent visibility and minimised lost load centre. A constant sideshift is included as well as bolt-on forks.

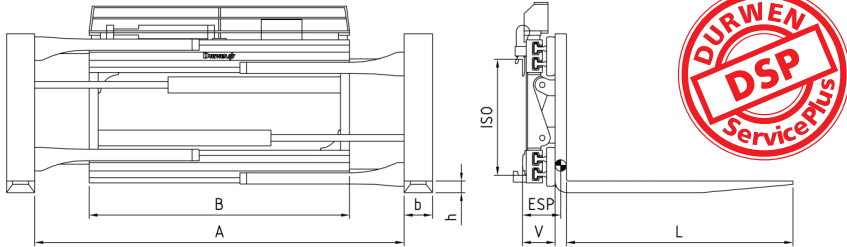

type	lift truck capacity tons	ISO	capacity on forks kg/mm LC	capacity as clamp kg/mm LC	A opening range ITI mm	B mm	forks b x h x l mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
PGK 50-S	5,0/600	IV	4800/600	3500/600	250-1800	1450	150x70x1200	+/- 160	179	230	925
					250-1900	1550				210	950
					250-2150	1800				205	1015
PGK 60-S	6,0	IV	6000/600	3800/600	250-1800	1450	150x70x1200	+/- 160	179	225	945
					250-2150	1800				205	1060
					250-2350	2000				200	1110
PGK 80-S	7,0-8,0	IV	8000/600	4800/600	160-1500	1350	200x70x1200	+/- 160	188	245	1250
					160-1950	1800				220	1380
					160-2150	2000				215	1440
					160-2350	2200				210	1510
PGK 100-S	8,0/900	IV	8000/900	7500/600	160-2000	2000	250x80x1200	+/- 160	198	230	1610
					160-2100	2100				225	1650
					160-2200	2200				220	1690
					160-2400	2400				215	1770
PGK 110-S	8,0/1100	IV	8000/1100	8000/600	160-2060	2200	250x90x1200	+/- 160	208	230	2380

- features bolt-on forks as standard
- includes hoses and couplings
- 2 hydraulic functions required
- toe in on forks as standard
- slip on arms see accessories
- sideshift with bottom rollers as standard

- cylinder protection upon request
- includes protection strip

