



# Sideshifting fork positioner

Integral sideshift, no forks

**PZV**

The **sideshifting fork positioner type PZV** uses T profile guides for positioning of forks. Compact design offers reliability and excellent operator visibility. Hook-on forks can be used. The integral sideshift is not available with forks fully open or fully closed.

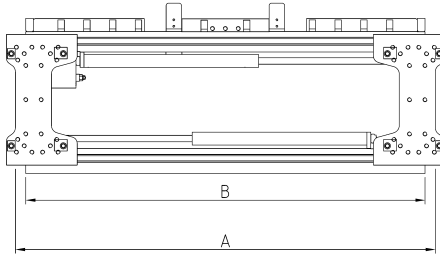

type	lift truck capacity tons	ISO	capacity kg/mm LC	opening range A mm	B mm	to suit fork with mm	V LLC mm	ESP COG mm	weight kg
PZV 25	1,5-2,5	II	2500/500	490-1060	980	80-150	114	60	130
				490-1120	1040			55	135
				490-1180	1100			53	138
				490-1230	1150			50	143
PZV 25-600	2,5/600	II	2500/600	490-1180	1040	80-150	119	58	140
				490-1230	1150			53	148
PZV 30	3,0	III	3000/500	490-1120	1040	80-150	119	55	147
				490-1230	1150			50	155
				490-1280	1200			49	160
				490-1330	1250			48	164
				490-1430	1350			47	172
PZV 35	3,5	III	3500/500	490-1120	1040	80-150	119	60	157
				490-1230	1150			55	165
				490-1280	1200			53	169
				490-1330	1250			50	173
				490-1430	1350			48	181
PZV 45	4,0-5/500	III	5000/600	490-1280	1200	80-150	129	73	192
				490-1330	1250			70	200
				490-1380	1300			68	208
				490-1390	1310			65	212
				490-1430	1350			63	216
				490-1530	1450			60	232
PZV 48	5,0/600	III	5000/600	490-1330	1310	80-150	154	76	225
				490-1430	1350			75	230
PZV 50	5,0/600	IV	5000/600	490-1330	1250	80-150	154	83	275
				490-1530	1450			75	325

- Includes hoses and couplings
- 2 hydraulic functions required
- Clamping of goods not allowed / possible
- If no sideshift required indicate on your order

## Bolt-on backrest

type	ISO	width B mm	height* h mm
LS-K 25	II	920-1100	1000
		1150-1350	1000
LS-K 45	III	1040-1150	1200
		1220-1350	1200

\* ISO 2328-A

**DURWEN**   
Forklift Attachments

More than 60 years experience