


Sideshifting fork positioner

Constant sideshift, no forks

PZV-S

The **sideshifting fork positioner type PZV-S** uses T profile guides for positioning of forks. Compact design offers reliability and excellent operator visibility. Hook-on forks can be used. The constant sideshift operates at any fork position.

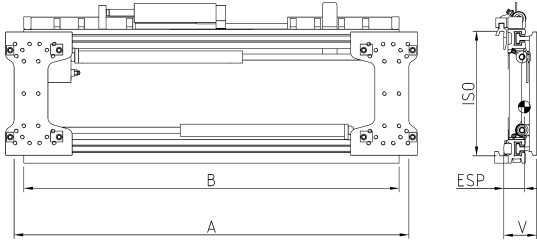

type	lift truck capacity tons	ISO	capacity kg/mm LC	opening range A mm	B mm	sideshift mm	to suit fork width mm	V LLC mm	ESP COG mm	weight kg
PZV 25-S	1,5-2,5	II	2500/500	490-1060	980	+/- 100	80-150	131	55	155
				490-1120	1040				50	160
				490-1180	1100				47	164
				490-1230	1150				45	168
PZV 25-600-S	2,5/600	II	2500/600	490-1180	1040	+/- 100	80-150	136	51	196
				490-1230	1150				46	178
PZV 30-S	3,0	III	3000/500	490-1120	1040	+/- 100	80-150	136	50	172
				490-1230	1150				45	180
				490-1280	1200				44	185
				490-1330	1250				43	189
PZV 35-S	3,5	III	3500/500	490-1430	1350	+/- 100	80-150	136	41	197
				490-1120	1040				55	182
				490-1230	1150				50	190
				490-1280	1200				47	194
PZV 45-S	4,0-5/500	III	5000/500	490-1330	1250	+/- 100	80-150	146	45	198
				490-1430	1350				43	206
				490-1280	1200				65	230
				490-1330	1250				63	234
PZV 48-S	5,0/600	III	5000/600	490-1380	1300	+/- 100	80-150	146	62	238
				490-1390	1310				61	239
				490-1430	1350				60	242
				490-1530	1450				58	248
PZV 50-S	5,0/600	IV	5000/600	490-1390	1310	+/- 100	80-150	146	78	250
				490-1430	1350				78	255
PZV 50-S	5,0/600	IV	5000/600	490-1330	1250	+/- 100	80-150	161	78	310

- Includes hoses and couplings
- 2 hydraulic functions required

- Clamping of goods not allowed / possible
- Load backrest see accessories



DURWEN 
Forklift Attachments

More than 60 years experience