




Sideshifting fork positioner

Constant sideshift, bolt-on forks

The **sideshifting fork positioner type RZV-GS** uses stable tube guides for fork positioning. The simple design offers reliability and excellent operator visibility. The constant sideshift operates at any fork position.

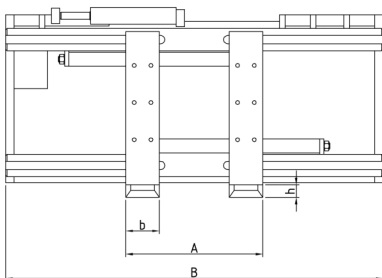

type	lift truck capacity tons	capacity kg/mm LC	ISO	B mm	opening range A mm	b x h x l mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
RZV 25-GS	1,5-2,5	2500/500	II	980	490-1060	120x40x1200	+/- 100	142	220	225
				1000	490-1080				218	261
				1040	490-1120				218	263
				1100	490-1180				218	267
				1150	490-1230				215	272
				1200	490-1280				215	275
				1350	490-1430				213	282
RZV 30-GS	3,0-3,2	3000/500	III	1040	490-1120	125x45x1200	+/- 100	152	210	313
				1100	490-1180				207	320
				1150	490-1230				205	326
				1200	490-1280				204	329
				1350	490-1430				203	340
RZV 35-GS	3,5	3500/500	III	1100	490-1180	140x50x1200	+/- 100	152	224	362
				1150	490-1230				222	368
				1200	490-1280				221	372
				1350	490-1430				218	383
RZV 45-GS	4,5-5/600	5000/600	III	1150	490-1230	150x60x1200	+/- 100	168	228	465
				1200	490-1280				227	468
				1250	490-1330				226	472
				1300	490-1380				226	476
				1350	490-1430				225	480
				1450	490-1530				222	448
				1550	490-1630				220	495

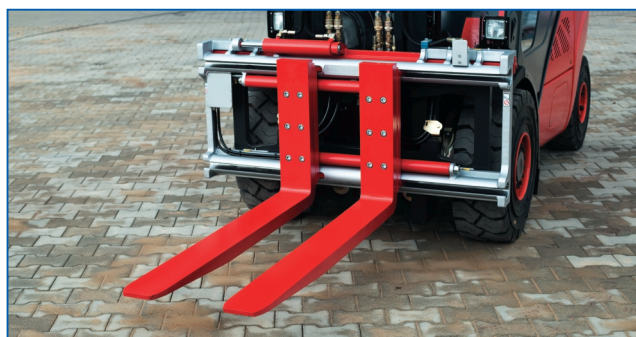

- Includes hoses and couplings
- 2 hydraulic functions required
- Clamping of goods not allowed / possible
- Load backrest see accessories
- Includes bolt-on forks

DURWEN 
Forklift Attachments

More than 60 years experience