



Sideshifting fork positioner

Constant sideshift, bolt-on forks

The **sideshifting fork positioner type RZV-GS** uses stable tube guides for fork positioning. The simple design offers reliability and excellent operator visibility. The constant sideshift operates at any fork position.

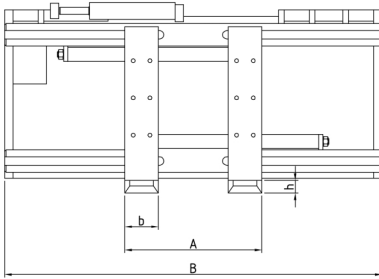

type	lift truck capacity tons	capacity kg/mm LC	ISO	B mm	opening range A mm	b x h x l	sideshift mm	V LLC mm	ESP COG mm	weight kg
RZV 50-GS	4,5-5,0/600	5000/600	IV	1250	490-1330	150x60x1200	+/- 100	180	220	542
				1350	490-1430				218	554
				1450	490-1530				215	566
RZV 60-GS	5,0-6,0/600	6000/600	IV	1460	560-1560	150x70x1200	+/- 160	190	185	805
				1860	560-1960				180	870
RZV 80-GS	7-8,0/600	8000/600	IV	1800	560-1900	200x70x1200	+/- 160	190	189	975
				1860	560-1960				189	985
				2000	560-2100				187	995
				2060	560-2160				186	1010
				2260	560-2360				183	1060
				2400	560-2500				179	1110
RZV 100-GS	8,0/900	8000/900	IV	2060	560-2160	200x80x1200	+/- 160	216	180	1230
				2260	560-2360				175	1285
				2400	560-2500				172	1340
RZV 110-GS	9,0/900-8,0/1100	8000/1100	IV	2060	560-2160	200x80x1200	+/- 160	218	190	1292
				2260	560-2360				186	1348
				2400	560-2500				183	1403

- Includes hoses and couplings
- 2 hydraulic functions required
- Clamping of goods not allowed / possible
- Load backrest see accessories
- Includes bolt-on forks

