


Sideshifting fork positioner

Constant sideshift, no forks



The **sideshifting fork positioner type RZV-S** uses stable tube guides for positioning of forks. The simple design offers reliability and excellent operator visibility. Hook-on forks can be used. The constant sideshift operates at any fork position.

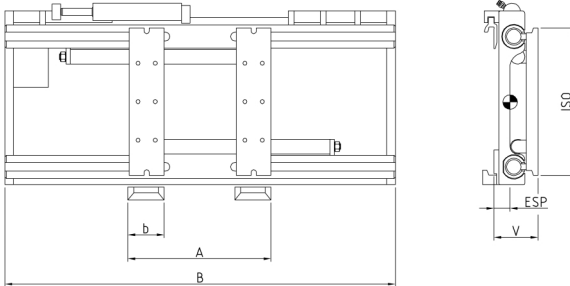

type	lift truck capacity tons	capacity kg/mm LC	ISO	B mm	opening range A mm	b mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
RZV 50 S	4,0-5,0/600	5000/600	IV	1250	490-1330	150	+/- 100	180	73	292
				1350	490-1430				73	305
				1450	490-1530				73	318
RZV 60 S	5-6,0	6000/600	IV	1460	560-1560	150	+/- 160	190	75	510
				1860	560-1960				75	590
RZV 80 S	7,0-8,0/600	8000/900	IV	1800	560-1900	200	+/- 160	190	72	590
				1860	560-1960				72	600
				2000	560-2100				72	605
				2060	560-2160				72	610
				2260	560-2360				72	660
2400	560-2500	72	710							
RZV 100 S	8,0/900	8000/900	IV	2060	560-2160	200	+/- 160	216	70	800
				2260	560-2360				70	855
				2400	560-2500				70	910
RZV 110 S	9,0/900-8,0/1100	8000/1100	IV	2060	560-2160	200	+/- 160	218	72	820
				2260	560-2360				72	875
				2400	560-2500				72	930

- Includes hoses and couplings
- 2 hydraulic functions required

- Clamping of goods not allowed / possible
- Load backrest see accessories

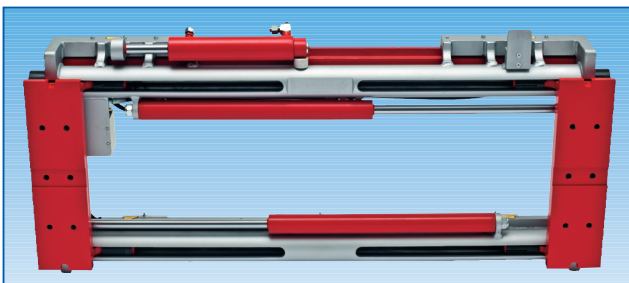

fork retainer