


Telescopic forks RZV-TGZ

with fork positioner and constant sideshift

RZV-TGZ



The **combined attachment RZV-TGZ** covers load extending, constant sideshift and fork positioning. It offers excellent visibility and a wide fork spread.

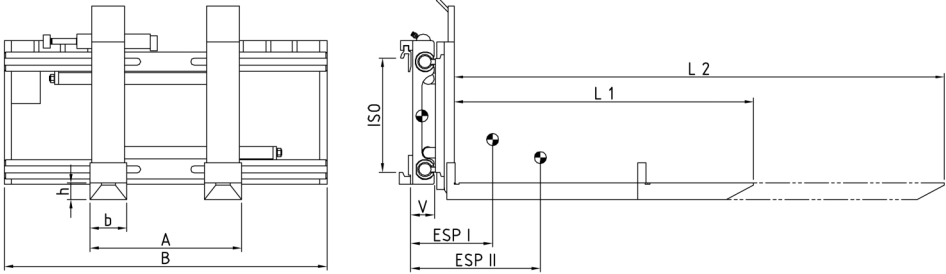

type	lift truck capacity tons	capacity kg/mm LC	ISO	B mm	opening range A mm	L1/L2 mm	sideshift mm	fork b mm	fork h mm	LLC	COG I / COG II	weight kg
RZV-TGZ.25.12	2500/500	2,0-2,5	II	1040	1200/2050	535-1165	+/- 100	165	56	142	338/459	347
RZV-TGZ.25.13	2500/500	2,0-2,5	II	1040	1350/2350	535-1165	+/- 100	165	56	142	386/535	362
RZV-TGZ.35.12	3500/500	3,0-3,5	III	1150	1200/2050	515-1255	+/- 100	165	56	152	342/428	391
RZV-TGZ.35.13	3500/500	3,0-3,5	III	1150	1350/2350	515-1255	+/- 100	165	56	152	369/501	411
RZV-TGZ.45.12	4500/600	4,0-4,5	III	1350	1200/2050	515-1455	+/- 100	165	56	168	286/375	465
RZV-TGZ.45.13	4500/600	4,0-4,5	III	1350	1350/2350	515-1455	+/- 100	165	56	168	327/441	485

- 3 hydraulic functions required
- includes hoses and couplings
- wear resistant mangan steel stripes (+5 mm) upon request
- bolt-on forks upon request
- different types or technical specifications upon request

options	remark
solenoid valve	please indicate voltage

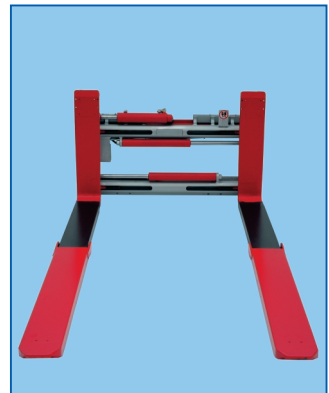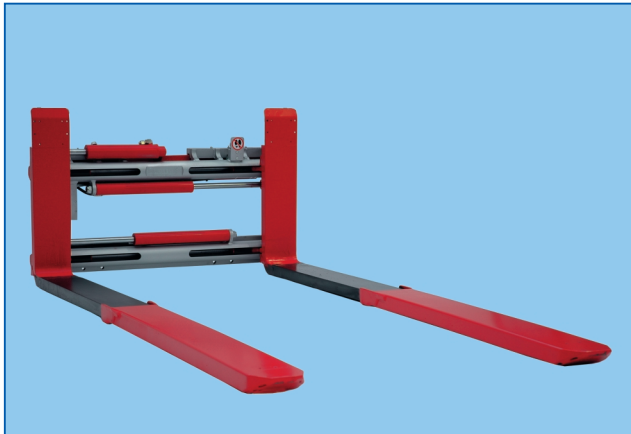

DURWEN 
Forklift Attachments

More than 60 years experience