


Sideshifting fork positioner

integral sideshift (via valve), bolt on forks


WZV-G

The **sideshifting fork positioner WZV-G** is extremely strong using a round bar system, keeping the lost load centre to a minimum. The attachment is equipped with bolt-on forks. The carriage width of the lift truck has to be at least equal to the width of the attachment.

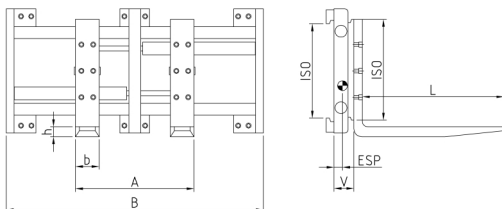

type	lift truck capacity tons	capacity kg/mm LC	ISO	B mm	opening range A mm	forks b x h x l mm	V LLC mm	ESP COG mm	weight kg
WZV 25 G	1,5-2,5	2500/500	II	880	320-780	120x40x1200	90	238	255
			II	920	320-820		90	238	257
			II	980	320-880		90	234	264
			II	1040	320-940		90	233	262
			II	1100	320-1000		90	231	268
			II	1150	320-1050		90	228	271
WZV 30 G	3,0-3,5	3500/500	III	1040	320-940	125x45x1200	90	244	294
			III	1100	320-1000		90	240	299
			III	1150	320-1050		90	237	304
			III	1200	320-1100		90	235	307
			III	1300	320-1200		90	232	312
WZV 45 G	4,0-5,0/600	5000/600	III	1100	370-1000	150x60x1200	101	297	416
			III	1200	370-1100		101	293	423
			III	1300	370-1200		101	290	430
			III	1350	370-1250		101	288	433
WZV 50 G	5,0	5000/600	IV	1250	380-1130	150x65x1200	104	251	525
			IV	1420	380-1300		104	245	542
			IV	1600	380-1480		104	242	550
WZV 60 G	6,0	6000/600	IV	1420	380-1300	150x70x1200	116	245	620
			IV	1600	380-1480		116	237	645
			IV	1800	380-1680		116	229	670
WZV 80 G	7,0-8,0	8000/600	IV	1800	480-1680	200x70x1200	128	248	848
			IV	2000	480-1880		128	241	885
			IV	2200	480-2080		128	236	910
WZV 100 G	8,0/900	8000/900	IV	2000	480-1880	200x80x1200	136	252	975
			IV	2200	480-2080		136	248	995
WZV 110 G	8,0/1100	8000/1100	IV	2000	480-1870	200x80x1200	146	245	1051
			IV	2200	480-2070		146	239	1078

- 2 hydraulic functions
- includes hoses and couplings
- includes sideshift via valve, depending opening range
- load backrest see accessories
- includes bolt-on forks
- includes adapters for hook-on forks

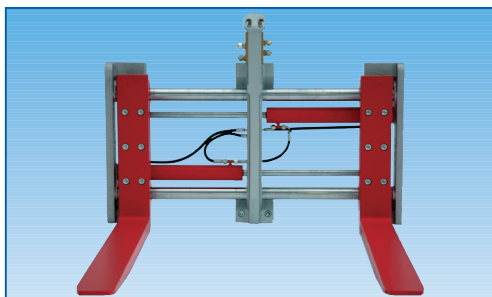

DURWEN 
Forklift Attachments

More than 60 years experience