


# Sideshifting fork positioner

ZVP

integral sideshift, bolt-on forks

The **sideshifting fork positioner ZVP** is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. A huge variety of loads can be handled with extreme efficiency. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with integral sideshift and bolt-on forks as standard. Clamping of loads is not possible with this attachment.

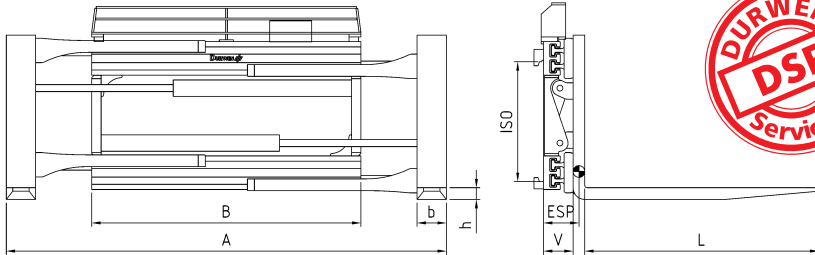

type	lift truck capacity tons	ISO	capacity kg/mm LC	A opening range OTD mm	B mm	forks b x h x l mm	V LLC mm	ESP COG mm	weight kg
ZVP 15	1,0-1,8	II	1500/500	560-1610	880	100x40x1200	126	220	305
				560-1710	980			213	315
				560-1780	1050			205	325
ZVP 25	2,0-2,5	II	2500/500	560-1710	980	125x45x1200	126	238	390
				560-1780	1050			228	400
				560-1810	1080			227	405
				560-1880	1150			222	415
				420-1600	1150			218	410
				560-1930	1200			224	422
				560-2130	1400			200	455
ZVP 30	3-3,2	III	3000/500	560-1730	1000	125x45x1200	126	226	407
				560-1780	1050			223	415
				560-1880	1150			215	430
				420-1600	1150			217	425
				560-1930	1200			218	438
				560-2030	1300			212	452
				560-2080	1350			210	460
				560-2180	1450			200	478
ZVP 35	3,5	III	3500/500	560-1880	1150	140x50x1200	136	242	485
				560-1980	1250			240	505
ZVP 40	4,0	III	4000/500	550-1960	1250	140x50x1200	138	217	605
				550-2060	1350			213	620
				550-2160	1450			210	638
ZVP 45	4,5-5,0/500	III	5000/500	550-1960	1250	150x60x1200	148	220	640
				550-2060	1350			215	660
				550-2160	1450			211	680
ZVP 48	5,0/600	III	4800/600	550-2060	1350	150x60x1200	158	205	690
				550-2160	1450			200	715

- 2 hydraulic functions required
- includes bolt-on forks
- if no sideshift required indicate on your order
- for backrest see accessories
- incl. protection strip

**DURWEN**   
Forklift Attachments

More than 60 years experience