


Sideshifting fork positioner

ZVP-A

integral sideshift, ISO adaptors

The **sideshifting fork positioner ZVP-A** allows the use of standard forklift truck forks and it is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with integral sideshift and bolt-on ISO adaptors for standard hook-on forks. Fully open or closed no sideshift.

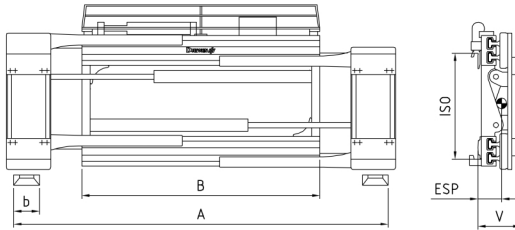

type	lift truck capacity tons	ISO	capacity kg/mm LC	A opening range OT0 mm	B mm	b mm	V LLC mm	ESP COG mm	weight kg
ZVP 15-A	1,0-1,8	II	1500/500	560-1710 560-1780	980 1050	120	179	141 138	290 298
ZVP 25-A	2,0-2,5	II	2500/500	560-1710 560-1780 560-1810 560-1880 420-1600 560-1930 560-2130	980 1050 1080 1150 1150 1200 1400	125	184	150 148 147 145 147 146 145	332 342 330 358 352 369 405
ZVP 30-A	3,0-3,2	III	3000/500	560-1730 560-1780 560-1880 420-1600 560-1930 560-2030 560-2080 560-2180	1000 1050 1150 1150 1200 1300 1350 1450	125	194	142 140 138 139 137 135 133 129	344 351 364 360 371 377 420 418
ZVP 35-A	3,5	III	3500/500	560-1880 560-1980	1150 1250	140	199	148 140	398 412
ZVP 40-A	4,0	III	4000/500	550-1960 550-2060 550-2160	1250 1350 1450	150	206	142 140 137	510 530 548
ZVP 45-A	4,5-5,0/500	III	5000/500	550-1960 550-2060 550-2160	1250 1350 1450	150	221	143 139 137	520 540 560
ZVP 48-A	5,0/600	III	4800/600	550-2060 550-2160	1350 1450	150	231	138 137	625 645
ZVP 50 A	5,0/600	IV	4800/600	550-2160 550-2260 550-2510	1450 1550 1800	150	248	148 150 139	690 710 760

- forks not included
- adaptors allow the use of hook-on forks
- 2 hydraulic functions required
- includes hoses and couplings
- for backrest see accessories
- if no sideshift required indicate on your order

DURWEN 
Forklift Attachments

More than 60 years experience