


Sideshifting fork positioner

ZVP-AS

constant sideshift, ISO adaptors

The **sideshifting fork positioner ZVP-AS** allows the use of standard forklift truck forks and it is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with constant sideshift and bolt-on ISO adaptors for standard hook-on forks.

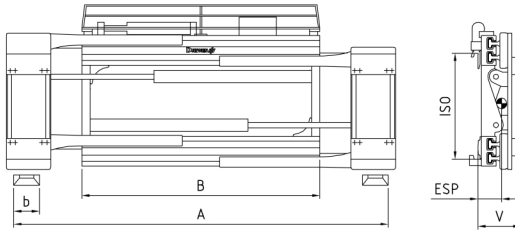

type	lift truck capacity tons	ISO	capacity kg/mm LC	A opening range OT0 mm	B mm	forks b x h x l mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
ZVP 15-AS	1,0-1,8	II	1500/500	560-1710 560-1780	980 1050	+/- 100	120	196	148 146	300 310
ZVP 25-AS	2,0-2,5	II	2500/500	560-1710 560-1780 560-1810 560-1880 420-1600 560-1930 560-2130	980 1050 1080 1150 1150 1200 1400	+/- 100	201	150 148 147 145 147 146 145	340 350 338 370 365 380 415	
ZVP 30-AS	3,0-3,2	III	3000/500	560-1730 560-1780 560-1880 420-1600 560-1930 560-2030 560-2080 560-2180	1000 1050 1150 1150 1200 1300 1350 1450	+/- 100	211	145 143 141 142 140 138 135 132	353 360 375 372 385 393 420 435	
ZVP 35-AS	3,5	III	3500/500	560-1880 560-1980	1150 1250	+/- 100	140	216	155 152	410 426
ZVP 40-AS	4,0	III	4000/500	550-1960 550-2060 550-2160	1250 1350 1450	+/- 100	150	223	147 145	525 545 565
ZVP 45-AS	4,5-5,0/500	III	5000/500	550-1960 550-2060 550-2160	1250 1350 1450	+/- 100	150	238	143 152 150	540 560 580
ZVP 48-AS	5,0/600	III	4800/600	550-2060 550-2160	1350 1450	+/- 100	150	248	140 138	645 655
ZVP 50 AS	5,0/600	IV	4800/600	550-2160 550-2260 550-2510	1450 1550 1800	+/- 160	150	269	148 150 139	745 765 820

- forks not included
- adaptors allow the use of hook-on forks
- 2 hydraulic functions required

- includes hoses and couplings
- for backrest see accessories
- features sideshift rollers

DURWEN 
Forklift Attachments

More than 60 years experience