


Sideshifting fork positioner

**ZVP
ISO IV**

integral sideshift, bolt-on forks

The **sideshifting fork positioner ZVP** is designed to allow fork spread beyond the width of the carriage. This flexible feature is ideal in situations where space is important. A huge variety of loads can be handled with extreme efficiency. This strong and durable attachment has excellent visibility and minimised lost load centre with the use of innovative double T / E profiles. The attachment is equipped with integral sideshift and bolt-on forks as standard. Clamping of loads is not possible with this attachment.

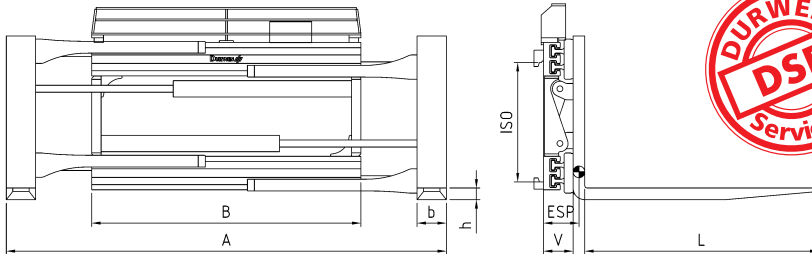

type	lift truck capacity tons	ISO	capacity kg/mm LC	A opening range OT0 mm	B mm	forks b x h x l mm	V LLC mm	ESP COG mm	weight kg
ZVP 50	5,0/600	IV	4800/600	550-1960	1250	150x60x1200	158	225	755
				550-2060	1350			223	775
				550-2160	1450			218	790
				550-2260	1550			206	810
				550-2510	1800			195	860
ZVP 60	6,0/600	IV	6000/600	550-2010	1300	150x65x1200	158	235	790
				550-2260	1450			230	815
				550-2510	1800			205	895
				550-2710	2000			190	990
ZVP 80	7,0-8,0	IV	8000/600	560-2070	1350	200x70x1200	165	245	1245
				560-2520	1800			228	1380
				560-2720	2000			215	1440
				560-2920	2200			210	1510
ZVP 100	8,0/900 9,0/600	IV	8000/900	560-2650	2000	200x80x1200	175	222	1610
				560-2750	2100			220	1640
				560-2850	2200			215	1680
				560-3060	2400			215	1770
ZVP 110	8,0/1100	IV	8000/1100	560-2850	2200	200x80x1200	186	230	1990
				560-3050	2400			225	2120

- 2 hydraulic functions required
- includes bolt-on forks
- for backrest see accessories
- incl. protection strip
- if no sideshift required indicate on your order