


Sideshifting fork positioner

ZVP-S
ISO IV



constant sideshift, bolt-on forks

The sideshifting fork positioner **ZVP-S** is designed to allow fork spread beyond the width of the carriage. The attachment is equipped with constant sideshift and bolt-on forks as standard. No clamping of loads allowed.

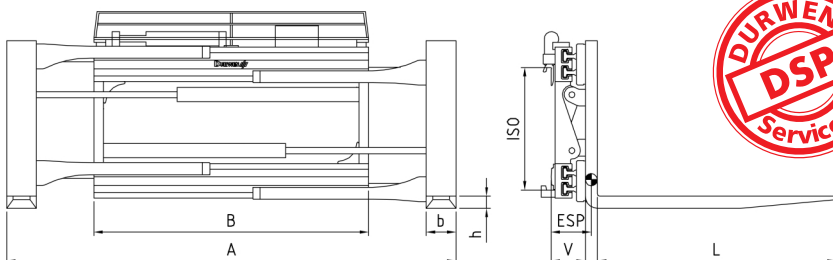

type	lift truck capacity tons	ISO	capacity kg/mm LC	A opening range O10 mm	B mm	forks b x h x l mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
ZVP 50-S	5,0/600	IV	4800/600	550-2160 550-2260 550-2510	1450 1550 1800	150x60x1200	+/- 160	179	205 196 190	870 890 945
ZVP 60-S	6,0	IV	6000/600	550-2160 550-2510 550-2710	1450 1800 2000	150x65x1200	+/- 160	179	225 205 200	890 970 1030
ZVP 80-S	7,0-8,0	IV	8000/600	560-2520 560-2720 560-2920	1800 2000 2200	200x70x1200	+/- 160	188	220 210 195	1450 1490 1610
ZVP 100-S	8,0/900	IV	8000/900	560-2650 560-2750 560-2850 560-3050	2000 2100 2200 2400	200x80x1200	+/- 160	198	215 210 205 195	1680 1720 1760 1840
ZVP 110-S	8,0/1100	IV	8000/1100	560-2850 560-3050	2200 2400	200x80x1200	+/- 160	209	220 215	2090 2220

- 2 hydraulic functions
- includes bolt-on forks
- features sideshift rollers
- for backrest see accessories
- incl. protection strip

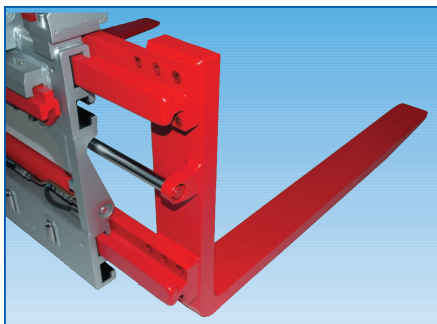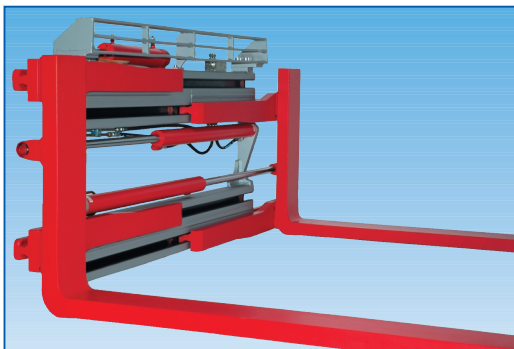

DURWEN 
Forklift Attachments

More than 60 years experience