


Hydraulic bucket

for agricultural goods

LSCH

The hydraulic bucket LSCH is ideal for loose and easy flowing materials e.g. grain, pulses and artificial fertiliser. A high volume, narrow bucket is very important when discharging into a small funnel or silo.

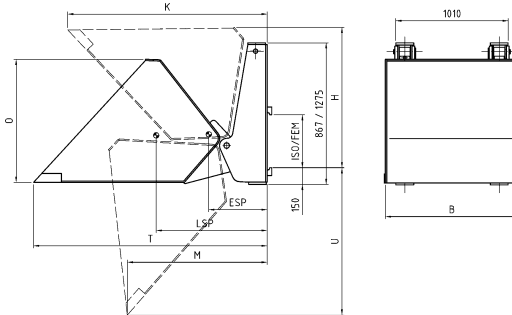

2 cylinder hydraulic bucket, max. specific weight 2500 kg / 1 m³

type	volume m ³	ISO	B mm	M mm	T mm	H mm	K mm	U mm	O mm	LC mm	ESP COG mm	weight kg
LSCH 2Z 06	0,6	II/III	1250	1000	1600	870	1420	920	850	820	400	400
LSCH 2Z 08	0,8	II/III	1250	1105	1825	995	1535	1055	880	900	430	440
LSCH 2Z 10	1,0	II/III	1250	1210	1930	1100	1640	1160	980	950	460	480
LSCH 2Z 12	1,2	III	1500	1230	1950	1120	1660	1280	1005	980	530	510

2 cylinder high volume hydraulic bucket, max. specific weight 2500 kg / 1 m³

type	volume m ³	ISO	B mm	M mm	T mm	H mm	K mm	U mm	O mm	LC mm	ESP COG mm	weight kg
LSCH 2Z 16	1,6	III	1500	1260	2100	1270	1800	1330	1110	820	620	790
LSCH 2Z 20	2,0	III/IV	2000	1260	2100	1270	1800	1330	1110	820	650	880
LSCH 2Z 25	2,5	III/IV	2500	1260	2100	1270	1800	1330	1110	820	690	990
LSCH 2Z 30	3,0	IV	2500	1360	2200	1370	1900	1440	1220	820	690	990

- backside height of frame 1270, width 1120 for 1,6 m³ and bigger.
- includes hoses and couplings
- 1 hydraulic function required
- quick release hooks: class 2, class 3, class 4 upon request



DURWEN 
Forklift Attachments

More than 60 years experience